

1008095201

## IP-LCM-A

IP Line Expansion Module with Inputs/Outputs



- ✓ 8 relay outputs
- ✓ 8 control inputs
- ✓ Robust push-in connectors for cables up to 1.5 mm<sup>2</sup> / 16 AWG
- ✓ Device powered via the TKIS-2 kit using PoE or local power
- ✓ All TKIS-2 features available

---

IC-EDGE IC-Edge  SIP  ICX-AlphaCom  Exigo




---

## Description

The IP-LCM-A is an IP Line Expansion module to the TKIS-2 that adds high power relays and robust control inputs to the kit without extra wiring. DIN-rail mounting allows for a flexible I/O device that reduces the amount of wiring for I/O inside racks and other systems. The large robust connectors enables connections to external cabling without adding extra terminals and have been especially chosen to enable quick and easy connection of such systems.

Exigo, ICX-AlphaCom, SIP and IC-EDGE systems are supported.

## Technical Dimensions

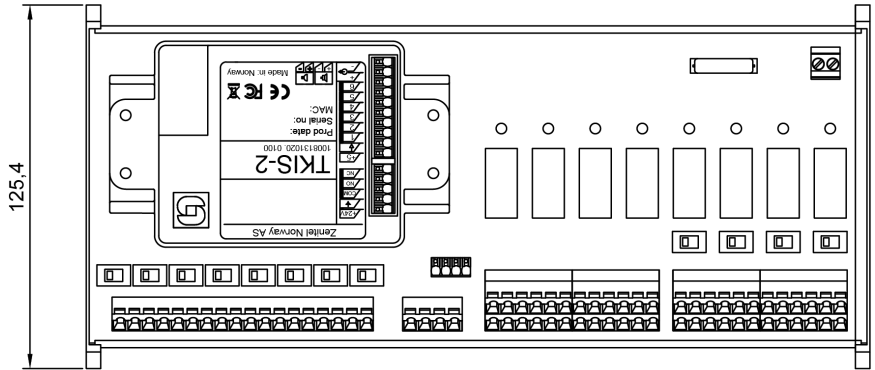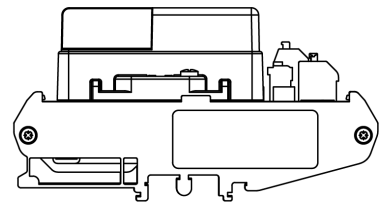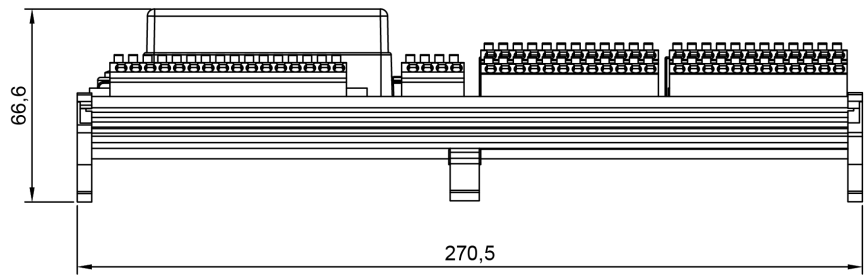

All dimensions in mm

# Specifications

## MECHANICAL

HxWxD	125.4mm x 270.5mm x 66.6mm
Mounting	Protected area, DIN-Mountable

## ENVIROMENTAL

Operational Temperature	-40°C to + 70°C
Storage Temperature	-40°C to + 70°C
Ingress Protection (IP)	N/A
Impact Protection (IK)	N/A

## ELECTRICAL (VIA TKIS-2)

Power options	PoE and/or external power supply
PoE (power over Ethernet)	IEEE 802.3af standard, Class 0 (0.44W to 12.95 W)
External power supply	24 VDC (16 – 48 V)
Power consumption	Idle 1.8W, max 12W

## CONNECTORS

Control Input	Push in
- without ferrule	0.5mm-1.5mm / 20 AWG - 16 AWG
- with ferrule with plastic/metal collar	0.75mm-1mm / 18 AWG - 17 AWG
Output relays	Push in
- without ferrule	0.5mm-1.5mm / 20 AWG - 16 AWG
- with ferrule with plastic/metal collar	0.75mm-1mm / 18 AWG - 17 AWG
Ethernet	RJ45
All other connectors on TKIS-2	Tool less, spring loaded, vibration proof terminals

## CONTROL OUTPUTS

Number of Control outputs	8
Relay outputs	DPDT (NO, NC, COM)
Switched voltage	< 250VAC Rated (400VAC Max - NOTE! lower rating on Relay 5-8 contact set #1)
Switched Load	< 2000 VA max
Switching Current	< 8A rated (12A max 1s)

## CONTROL INPUTS

Robust control input	8
Type	Closing contact or active input
Closing contact / Dry contract	12V
Active input	12Vdc - 48Vdc

## GENERAL PURPOSE INPUT OUTPUT

Number	6 (configurable)
Connectors	Tool less, spring loaded, vibration proof terminals
Output	12mA as LED drivers

## ENVIROMENTAL

Immunity	EN 60945, EN 61000-6-1, EN 61000-6-2
Emmision	EN 60945, EN 61000-6-3, EN 61000-6-4
Safety	EN 60950

## Used With



## TKIS-2

VoIP Intercom Module